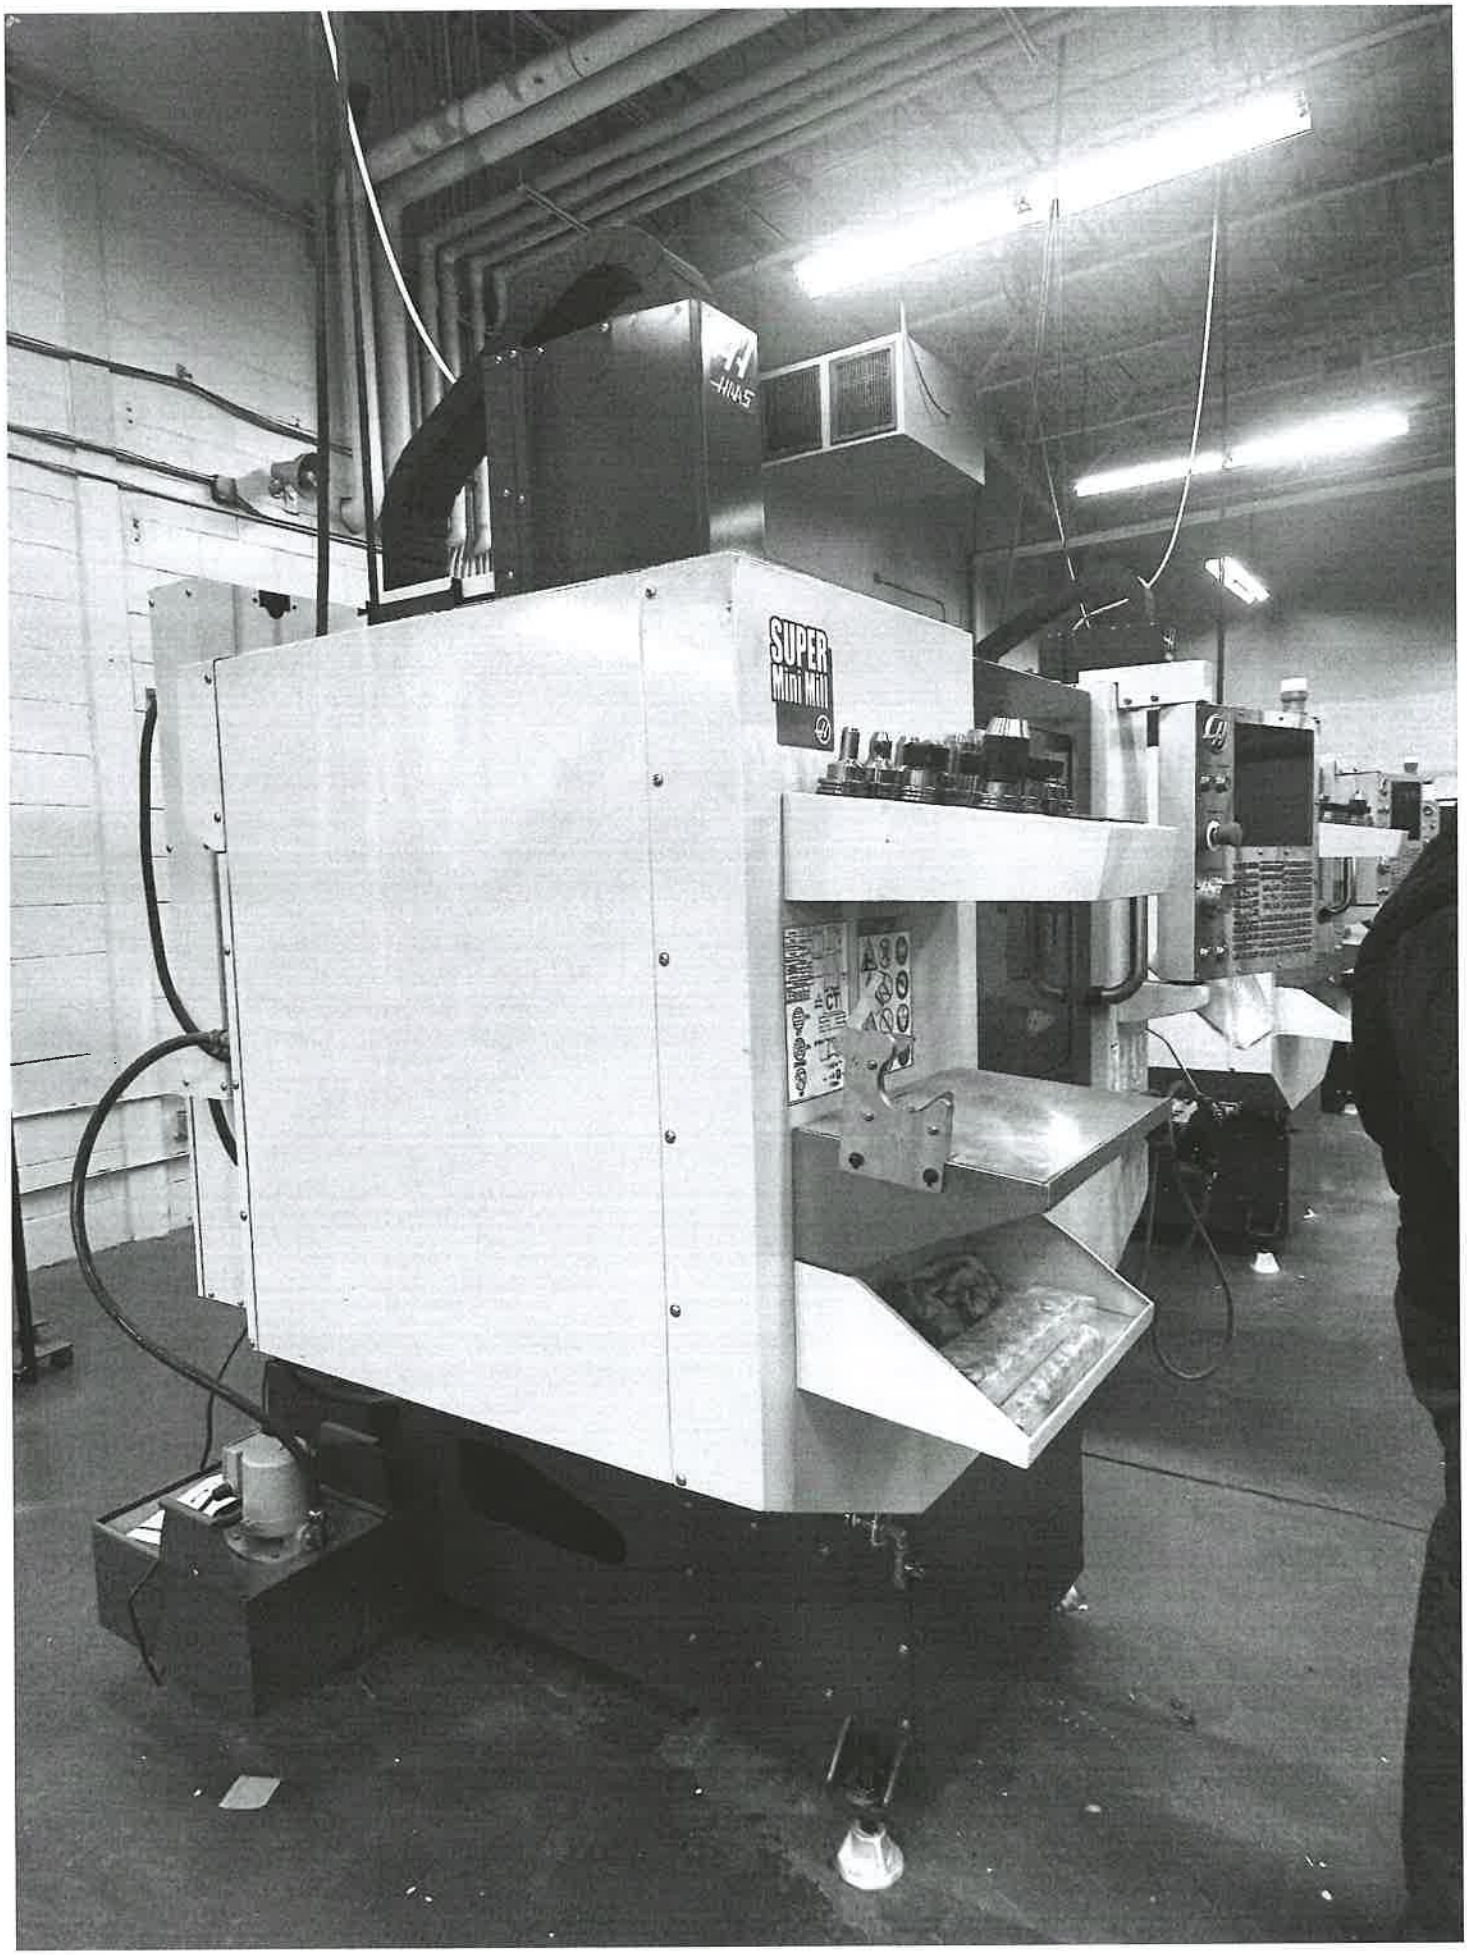
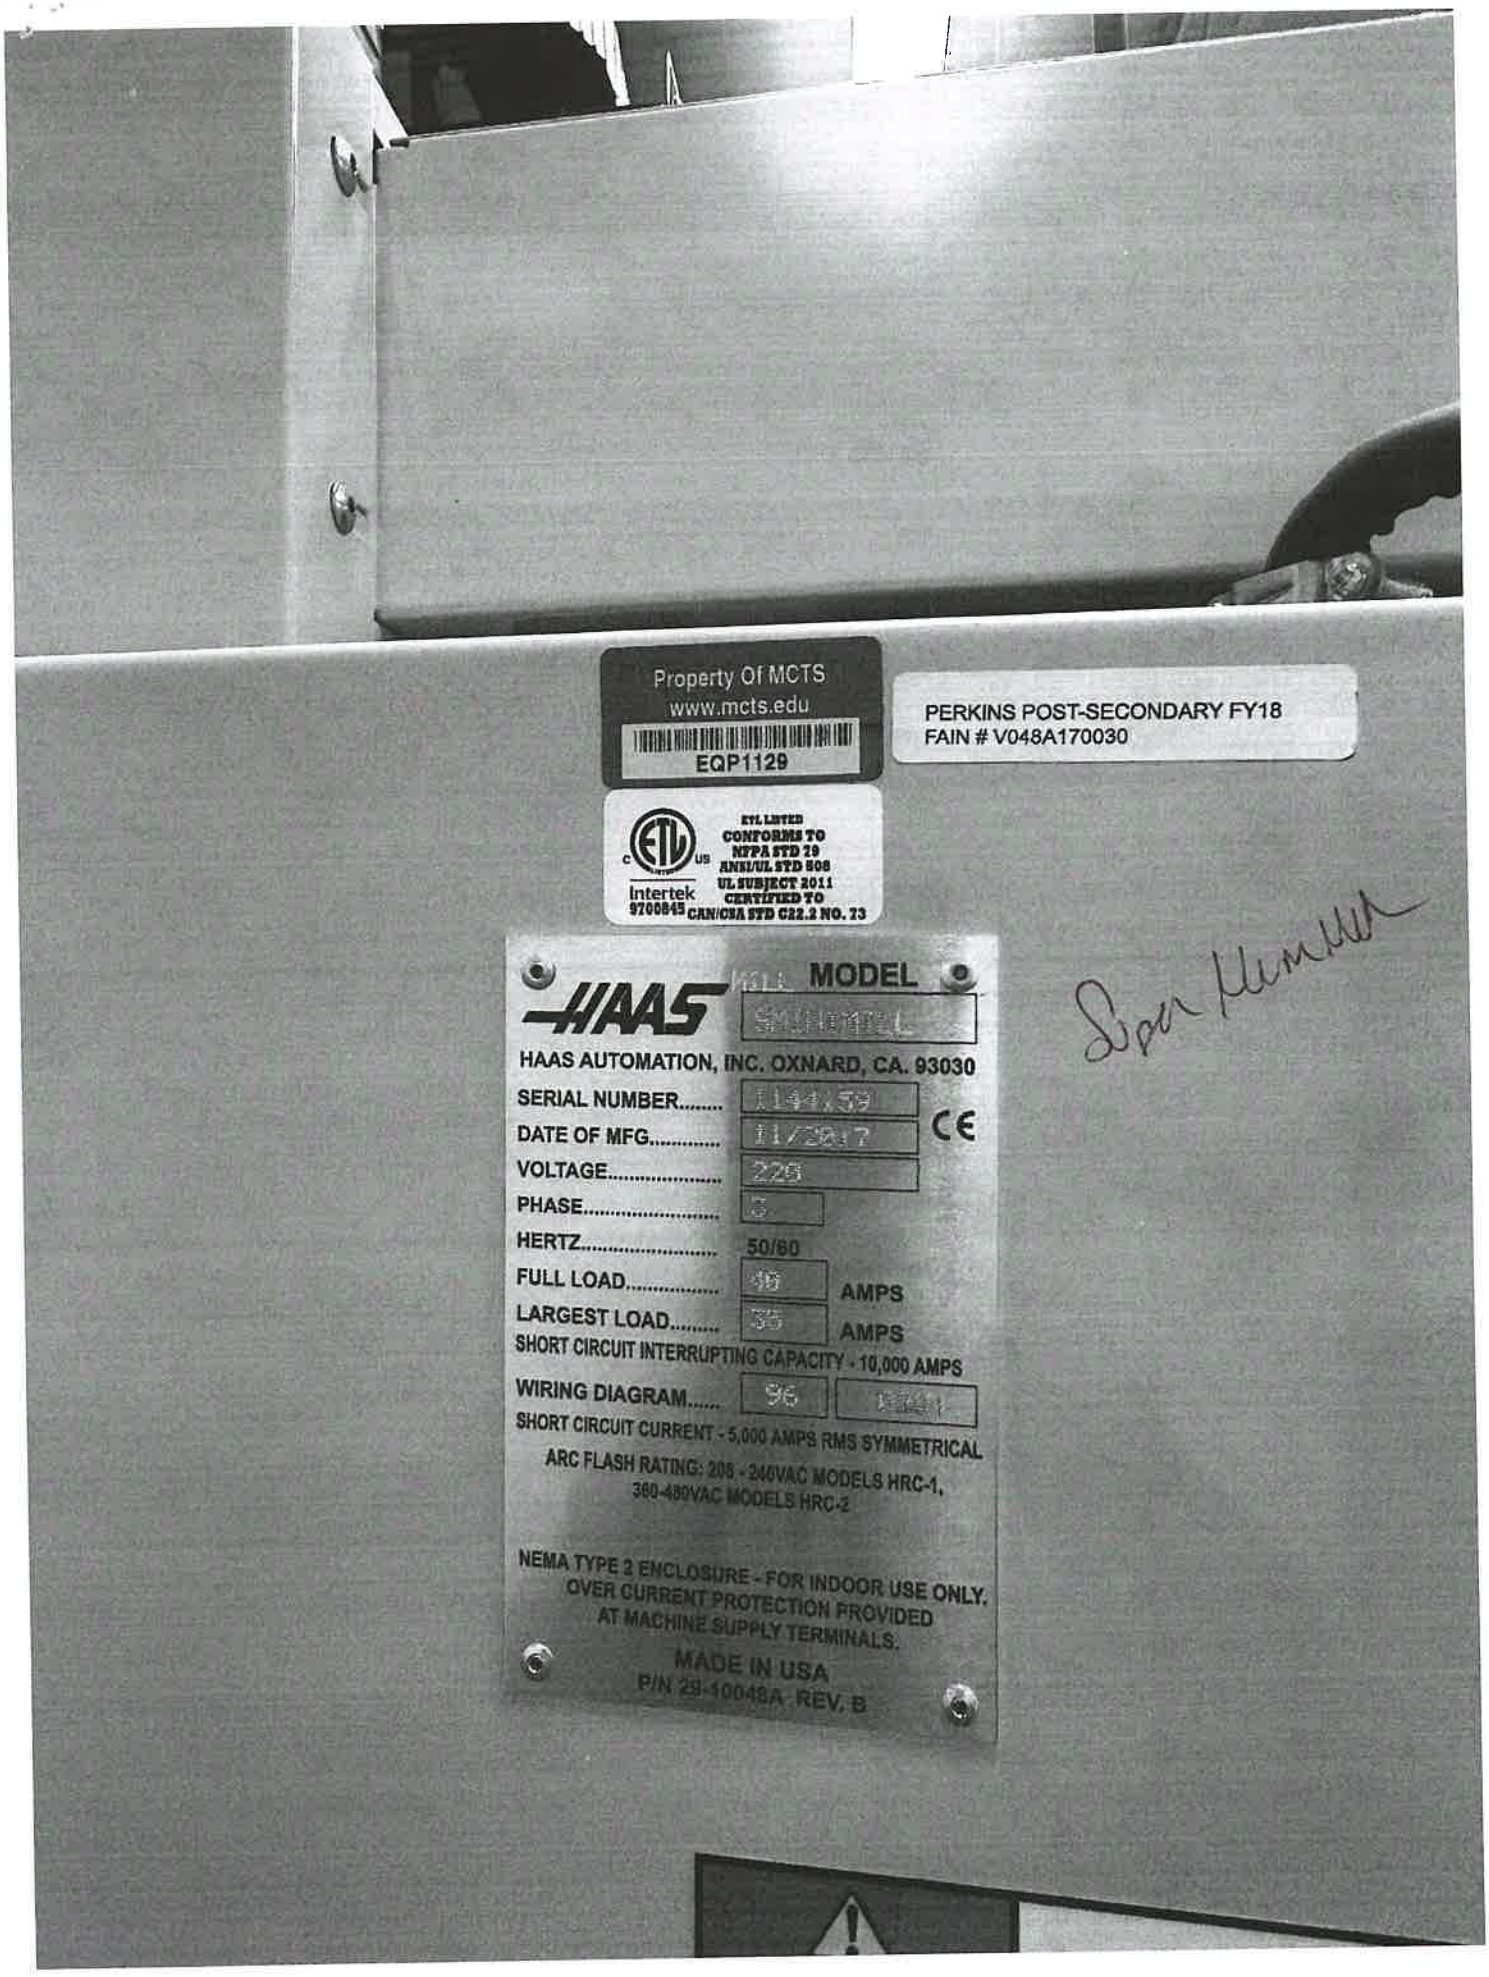

HAAS
SUPER
Mini Mill


Property Of MCTS
www.mcts.edu
EQP1129
PERKINS POST-SECONDARY FY18
FAIN # V048A170030
ETL LISTED
CONFORMS TO
NFPA STD 79
ANSI/UL STD 508
UL SUBJECT 2011
CERTIFIED TO
CAN/CSA STD C22.2 NO. 73
Intertek
9700845
HAAS
MODEL
HAAS AUTOMATION, INC. OXNARD, CA. 93030
SERIAL NUMBER.....
DATE OF MFG.....
VOLTAGE..... 220
PHASE..... 3
HERTZ..... 50/60
FULL LOAD..... 46 AMPS
LARGEST LOAD..... 35 AMPS
SHORT CIRCUIT INTERRUPTING CAPACITY - 10,000 AMPS
WIRING DIAGRAM..... 96
SHORT CIRCUIT CURRENT - 5,000 AMPS RMS SYMMETRICAL
ARC FLASH RATING: 208 - 240VAC MODELS HRC-1,
380-480VAC MODELS HRC-2
NEMA TYPE 2 ENCLOSURE - FOR INDOOR USE ONLY.
OVER CURRENT PROTECTION PROVIDED
AT MACHINE SUPPLY TERMINALS.
MADE IN USA
P/N 29-10048A REV. B