




V-Blade KV552

3000 series
4000 series

The 55 inch side Ventrac KV552 V-Blade maximizes efficiency with the ability to quickly change from V plow to Scoop to straight blade, all from the convenience of Ventrac's exclusive S.D.L.A. control system. With a 48" V width, the KV552 is ideal for walks and areas that larger blades are unable to plow.

Standard features include hydraulically activated wing cylinders, mechanical trip, adjustable cast iron skid shoe discs, reversible high carbon hardened steel cutting edges, and a center shoe for gliding over rough terrain. Pivot points are fully greasable to ensure proper operation, even in the worst environments.

The KV552 V-Blade fits Ventrac 3000 and 4000 series tractors, and requires the 12V switch and plug kit.

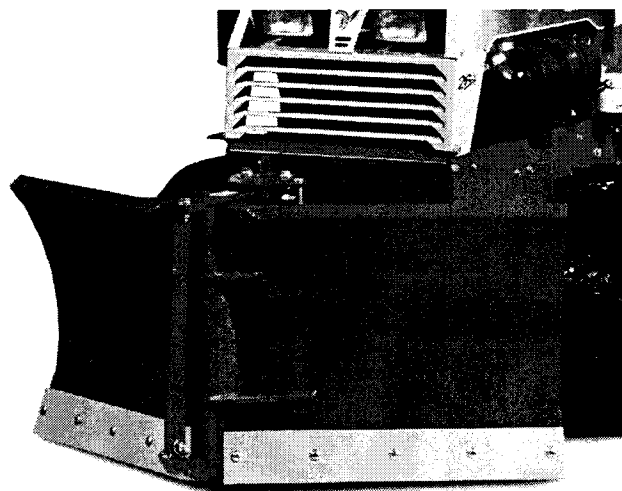


Standard Features:


- Hydraulically angle either wing
- Adjustable cast iron skid shoe discs
- Adjustable Spring controlled trip mechanism
- Trip Lockout Pin for Digging in material
- Reversible, Changeable Cutting Edge
- Center mounted skid shoe
- Ventrac Mount System
(Requires 12 Volt Switch Plug Kit)

Optional Accessories:


- Top Deflection Flap
- 6 and 12 inch Flare Extension kits
- Polyurethane Cutting Edge

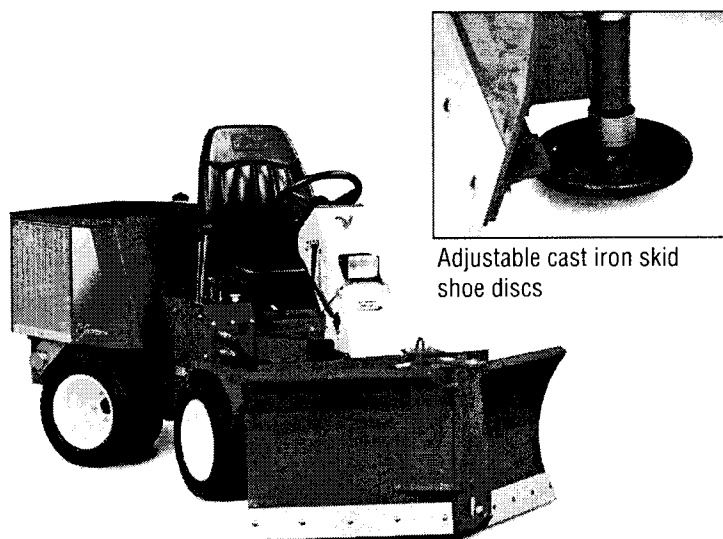


Adjustable cast iron skid shoe discs



Pulled Back



Extended



Forward

Hydraulically angle either wing

VENTRAC®
MOUNT
SYSTEM



328 East Water St • PO Box 148 • Orrville, OH 44667
330.683.0075 • 1.866.VENTRAC (836.8722)
Fax: 330.683.0000
www.ventrac.com • info@ventrac.com

Specifications

V-Blade KV552

3000
series
4000
series

	KV552
Stock Code	39.55271
Required 12 Volt Switch/Plug Kit for 4000 Series	70.4039
Required 12 volt Switch/Plug Kit for LE3100, LE3200	70.3016
Hydraulic Power Angle	Independent cylinders
Blade Wing Selection	Electric Solenoid
Spring Trip	Mechanical On/Off
Max Wing Angle (Left/Right)	30 Degrees
Adjustable Skid Shoes	Standard
Optional Accessories	
Top Deflection Flap	70.8044
Flare Kit, 6 inch extension (15 cm)	70.8045
Flare Kit, 12/6 inch extension (31/15 cm)	70.8046
Straight Extension Kit, 6 inch (15 cm)	70.8047
Polyurethane Cutting Edge	70.8048
Dimensions	
Length, Wings Back	38 inches (96 cm)
Length with 3000 Series Tractor	96.25 inches (244.5 cm)
Length with 4000 Series Tractor	105.75 inches (269 cm)
Width, Wings Back	48 inches (122 cm)
Width, Wings Straight	55 inches (140 cm)
Width, Wings Forward	48.5 inches (123 cm)
Height	24 inches (61 cm)
Weight	240 lbs (109 kgs)
Shipping Weight	372 lbs (169 kgs)
Shipping Dimensions (LWH)	52.25x35x27.125 inches (133x89x69 cm)

All specifications subject to change without notice or obligation



328 East Water St • PO Box 148 • Orrville, OH 44667
330.683.0075 • 1.866.VENTRAC
Fax: 330.683.0000
www.ventrac.com • info@ventrac.com