

COVERS: Accessibility to all important parts to the paver is provided by cover panels. A bolted panel at the rear of the hopper area provides access to oil filter and alternator. Hinged top covers give access to rear for service of engine filters, injector pump, starter motor, and fuel filler (small flap). Hinged rear deck panel gives access to hydraulic tank filler.

TOW POINT: Pinned tow point designed so grade control with leveling cylinders can be added as an option.


SCREEDS: Option to provide 816 Extend-A-Mat or SV-80. Maximum paving width is 15'-6" with 816, and 18'-0" with the SV-80.

OPTIONS:

GRADE CONTROL: Grade control with leveling cylinders.

Grade and Slope Control: Gradline 76 Series time proportional grade and slope controls with necessary mounting.

References, Paving Lights, and Truck Hitch.

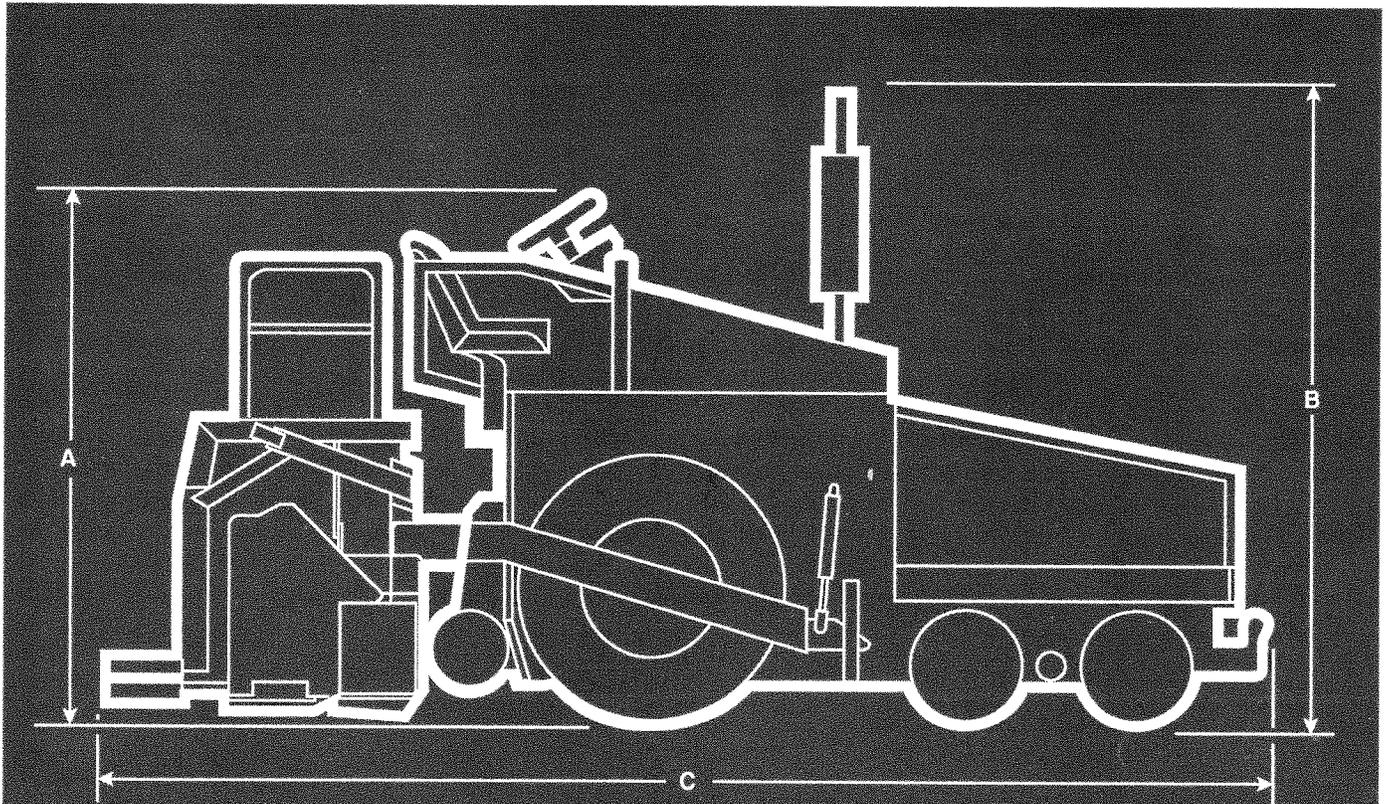

BG-210 DIMENSIONAL DATA SUMMARY

A Height Shipping (Min.) 8'-5-1/4"

B Height Operating 9'-4"

C Length
w/ SV-80 16'-1"
w/816 18'-8"

Width Shipping 8'-2-1/2"
Width Operating 10'-7"
Wheel Base 79"

Weights

| | |
|--------------|-------------|
| Tractor Only | 18,000 Lbs. |
| w/SV-80 | 20,500 Lbs. |
| w/816 | 23,000 Lbs. |